

ADAPTIVE CONTROLLER DESIGN FOR TRAJECTORY TRACKING IN SECOND-ORDER SYSTEMS: APPLICATION TO DC MOTOR VELOCITY CONTROL

Efrain Ibarra Jimenez¹
Omar Vargas Gutiérrez
Ricardo Chapa García
Romeo Selvas Aguilar

Received 09.03.2026.
Revised 02.06.2026.
Accepted 19.06.2026.

Keywords:

*Adaptive control, Trajectory tracking,
Second-order systems, DC motor
control, Experimental implementation*

A B S T R A C T

This paper presents the design and implementation of a structured model-based reference tracking controller for second-order dynamical systems. A theoretical foundation is established by proving that the tracking error dynamics can be reduced to a first-order equation, significantly simplifying the control design. Based on this theoretical framework, a control law is proposed to ensure that the system follows a desired reference trajectory. The controller's structure inherently compensates for parameter uncertainties through feedback terms, eliminating the need for explicit online estimation. The proposed controller is implemented on a DC motor to regulate its angular velocity. Experimental results are provided, demonstrating the effectiveness of the controller in achieving precise trajectory tracking under real operating conditions. A comparative analytical assessment with conventional PID control highlights the advantages of the proposed approach in terms of systematic tuning, guaranteed stability, and predictable convergence.



© 2026 Published by Faculty of Engineering

1. INTRODUCTION

Control theory has become a cornerstone of engineering and applied sciences, offering rigorous mathematical tools for analyzing and regulating dynamic systems. Its primary goal is to design control laws that ensure stability, robustness, and desired performance, even in the presence of nonlinearities, uncertainties, or external disturbances. Over the past decades, control theory has been applied to a wide range of domains, including industrial machinery, autonomous mobile robots,

renewable energy systems, and diverse technological devices. The adaptability of control theory has made it indispensable in both academic research and industrial practice, where the demand for reliable and efficient control strategies continues to grow.

Beyond its practical applications, control theory has also evolved as a unifying framework that connects classical mechanics, signal processing, and optimization. The development of modern control paradigms, including adaptive, robust, and nonlinear control, has expanded its

¹ Corresponding author: Efrain Ibarra-Jimenez
Email: efrainibarra@itdurango.edu.mx

reach to systems characterized by time-varying parameters and complex interactions. These advances have enabled the formulation of controllers capable of learning and adjusting in real time, bridging the gap between theoretical models and experimental implementation. Moreover, the integration of control principles with artificial intelligence and data-driven modeling has opened new perspectives for autonomous decision-making and predictive regulation in dynamic environments.

The design and development of theoretical control laws have been extensively studied, with numerous contributions advancing the state of the art. These works have explored nonlinear control, adaptive regulation, and optimization-based approaches, providing frameworks that extend the applicability of control theory to increasingly complex systems. Collectively, they highlight the continuous evolution of the field and its relevance to emerging technological innovations, some noteworthy theoretical control laws can be found in the following studies: (Acosta Lúa et al., 2021; Ekow Abban, 2021; Honda et al., 2023; Jimenez-Lizarraga et al., 2015, 2018, 2019; Shui et al., 2022; Shukla et al., 2024; Singh et al., 2024).

Beyond theoretical advances, implementation and experimental validation are essential for bridging the gap between abstract models and real-world applications. Experimental studies provide evidence of feasibility, reveal practical limitations, and guide refinements in controller design. Several studies have focused on temperature regulation, motor control, and vehicular systems, thereby demonstrating how theoretical concepts can be successfully translated into practical implementations. These contributions underscore the critical role of experimental validation in confirming that control laws are not only mathematically rigorous but also technologically feasible: (Chapa et al., 2023; Nichols et al., 2025; Nizami et al., 2025; Oliver Wane et al., 2024; Zekraoui et al., 2025)

While existing adaptive control strategies often rely on complex online parameter estimation algorithms requiring persistent excitation conditions (Montoya-Acevedo et al., 2024; Nizami et al., 2025; Varga et al., 2024), the present work introduces a fundamentally different approach. By applying an order-reduction transformation to the error dynamics, the control law is derived without requiring adaptation laws or complex online estimators. This simplification yields a controller that is both theoretically rigorous and practically implementable, offering a unique balance between mathematical sophistication and engineering accessibility. The proposed methodology contributes to the ongoing discourse on control theory by presenting a practical application that bridges the gap between

abstract model reduction techniques and real-world implementation.

This work presents the control of angular velocity in a direct current (DC) motor. The physical setup of the motor used in the experiments is shown in Figure 1, while the corresponding block diagram representing its dynamic behavior is presented in Figure 2. The dynamic of the DC motor system is represented by a second-order differential equation. To simplify the model, order reduction theory was applied, allowing the system to be treated as a first-order one (Kim et al., 2022; Müller et al., 2021; Prajapati & Prasad, 2022; Touzé et al., 2021; Yang et al., 2024).

Building upon this reduced-order model, we propose a novel adaptive controller for trajectory tracking. The controller ensures that the angular velocity of the DC motor follows a desired reference trajectory with high accuracy. Its adaptive nature allows it to adjust to variations in system parameters and external disturbances, thereby guaranteeing robustness. Theoretical analysis and experimental validation confirm that the tracking error converges to zero, demonstrating the effectiveness of the proposed approach. Similar adaptive strategies have been reported in the literature, emphasizing the importance of adaptability in modern control systems, (Montoya-Acevedo et al., 2024; Nizami et al., 2025; Varga et al., 2024).



Figure 1. DC motor

Experimental tests of the adaptive controller implemented on the DC motor demonstrated the functionality and effectiveness of the designed controller under real operating conditions. This research work contributes to the broader scientific dialogue on control theory by presenting a practical application of adaptive control to DC motor velocity regulation. The integration of order reduction techniques with adaptive trajectory tracking provides a framework that is both theoretically novel and experimentally validated. The results presented herein reinforce the importance of experimental validation and highlight the potential of adaptive control strategies to enhance the performance and reliability of electromechanical systems.

In addition, the study illustrates how reduced-order modeling can simplify controller design without compromising accuracy, thereby facilitating real-time implementation in resource-constrained environments. The methodology also underscores the relevance of

adaptive mechanisms in addressing parameter uncertainties, which are inherent in industrial and robotic applications. By bridging theoretical advances with experimental verification, this work strengthens the foundation for future developments in intelligent control architectures. Ultimately, the findings highlight the transformative role of adaptive control in enabling scalable, reliable, and efficient solutions for complex dynamical systems.

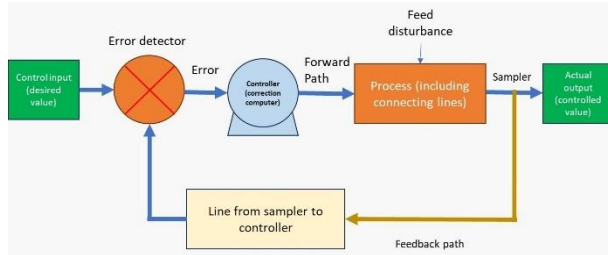


Figure 2. Block diagram of a DC motor system.

2. PROBLEM STATEMENT

The control of angular velocity in direct current (DC) motor is a fundamental problem in industrial and robotic applications, where precise tracking of references trajectories is essential. The dynamics of a DC motor can be modeled as a second-order system, where the angular velocity $\omega(t)$ is governed by the following differential equation:

$$\ddot{\omega}(t) + a\dot{\omega}(t) + b\omega(t) = \frac{k_m}{JL}v(t) - \frac{k_m R}{JL}i(t) \quad (1)$$

Where the parameters represent electrical and mechanical characteristics of the motor, as defined as Table 1.

Table 1. Variables and parameters of the DC motor

Symbol	Description	Units
$\omega(t)$	Angular velocity	rad/sec
$v(t)$	Voltage input	V
$i(t)$	Armature current	A
k_m	Motor torque constant	N · m/A
J	Moment of inertia	kg · m ²
L	Inductance	H
R	Resistance	Ω
B	Friction Coefficient	N · m · s/rad
k_a	Back electromotive force (EMF) constant	V · s/rad

The parameters a and b in equation (1) are system constants, defined as:

$$a = \frac{B}{J}, \quad b = \frac{k_m k_a}{JL} \quad (2)$$

Equation (1) was derived by analyzing the electrical circuit and the mechanical dynamics of the motor. A detailed derivation can be found in Appendix A.

To simplify the control design, the input voltage $v(t)$ is proposed as:

$$v(t) = \frac{JL}{k_m} \left(u(t) + \frac{k_m R}{JL} i(t) \right) \quad (3)$$

where $u(t)$ is a virtual control input. Substituting this into the motor dynamics yields the following simplified second-order system:

$$\ddot{\omega}(t) + a\dot{\omega}(t) + b\omega(t) = u(t) \quad (4)$$

The control objective is to design $u(t)$ such that the angular velocity $\omega(t)$ follows a reference trajectory $\omega_r(t)$ ensuring that the tracking error $e(t) = \omega(t) - \omega_r(t)$ converges to zero as $t \rightarrow \infty$. This is achieved through a trajectory tracking strategy for second-order systems.

3. CONTROL STRATEGY

In this section, we present the theoretical framework for the design of the adaptive controller. The central motivation is to reformulate the system dynamics into a simplified representation that facilitates controller synthesis while preserving the essential characteristics of the original model. Specifically, the dynamics of the DC motor are expressed in terms of a second-order differential equation, which captures both the electrical and mechanical interactions inherent to the system. While such a formulation is accurate, it often complicates the design of control laws due to the presence of multiple coupled variables and higher-order terms.

To overcome these challenges, the key idea is to reduce the system dynamics to a first-order equation. This transformation is not merely a mathematical convenience but a strategic step that enables the application of adaptive control techniques with greater efficiency. By working with a reduced-order model, the complexity of the control design is significantly diminished, allowing for the derivation of analytical results that are easier to interpret and implement in practice.

Moreover, the first-order representation provides a clearer link between the input and output variables, which is particularly advantageous for trajectory tracking problems where the objective is to ensure that the system output follows a desired reference signal. In addition, the reformulation highlights the broader methodological principle of model simplification in control theory. Complex systems often require approximations or reductions to make controller design tractable, and the approach adopted here exemplifies how such techniques can be systematically applied. The reduced-order model not only facilitates theoretical analysis but also enhances the feasibility of real-time implementation, since controllers based on simpler models demand fewer computational resources. This balance between

mathematical rigor and practical applicability is a defining feature of modern adaptive control strategies. The following theorem therefore establishes the fundamental transformation that enables the subsequent development of the adaptive controller. It provides the formal link between the original second-order dynamics and the reduced first-order representation, ensuring that the adaptive control law derived in later sections is both theoretically justified and practically implementable.

3.1 Reduction of Order in Differential Equations

Theorem 1. Consider the second-order differential equation:

$$\ddot{e}(t) + 2c\dot{e}(t) + c^2e(t) = 0, \quad (5)$$

where c is constant parameter, $e(0) = e_0$ and $\dot{e}(0) = \dot{e}_0$ are the initial conditions. Then, system (5) is equivalent to the following first-order differential equation:

$$\dot{\sigma}(t) + c\sigma(t) = 0 \quad (6)$$

where:

$$\sigma(t) = \dot{e}(t) + ce(t), \dot{\sigma}(t) = \ddot{e}(t) + c\dot{e}(t). \quad (7)$$

Proof: To prove the equivalence, it is necessary to show that systems (5) and (6) are equal. For proving this, we substitute expressions σ and $\dot{\sigma}$ given in (7) into (6) obtaining that:

$$\ddot{e} + c\dot{e} + c(\dot{e} + ce) = \ddot{e} + 2c\dot{e} + c^2e = 0. \quad (8)$$

As shown in (8), the equality holds. Hence, the equivalence between systems (5) and (6) has been proven.

Remark 1. Theorem 1 reduces the second-order error dynamics to a first-order equation via $\sigma = \dot{e} + ce$. Unlike sliding mode control, no discontinuous terms appear, avoiding chattering. This is not a robust control approach; it only provides structural conditions for asymptotic stability where the parameter c governs the convergence toward zero (see Section 4.2).

3.2 Solution to the Equivalent First-Order System

Once the system (5) is transformed into its first-order representation (6), the solution for $e(t)$ can be explicitly obtained. The following lemma provides the solution.

Lemma 1. Consider the equivalent first-order differential equation (6) with initial condition $\sigma(0) = \sigma_0$. Then, the solution $e(t)$ to the original system (5) is given by:

$$e(t) = (e_0 + (\dot{e}_0 + ce_0)t) \exp(-ct) \quad (9)$$

Moreover, if $c > 0$, the solution $e(t) \rightarrow 0$ as $t \rightarrow \infty$.

Proof: First, note that (6) is a separable equation, so, by integrating both sides $\int \frac{d\sigma(t)}{\sigma(t)} = -c \int dt + D$, we have $\sigma(t) = D \exp(-ct)$, and applying the initial condition $\sigma(0) = \sigma_0$, we find that $D = \sigma_0$. Thus,

$$\sigma(t) = \sigma_0 \exp(-ct) \quad (10)$$

Being as, $\sigma(t) = \dot{e}(t) + ce(t)$, we have:

$$\dot{e}(t) + ce(t) = \sigma_0 \exp(-ct) \quad (11)$$

Now multiplying both sides by $\exp(ct)$ we have

$$\exp(ct) \times (\dot{e}(t) + ce(t)) = \sigma_0 \quad (12)$$

Using the fact that $\exp(ct) \times (\dot{e}(t) + ce(t)) = \frac{d}{dt}(e(t) \times \exp(ct))$, we have $d(e(t) \times \exp(ct)) = \sigma_0 dt$. Integrating and considering that $e(0) = e_0$, we obtain:

$$e(t) = (\sigma_0 t + e_0) \exp(-ct), \quad (13)$$

Substituting $\sigma_0 = \dot{e}_0 + ce_0$ into (13) and simplifying, we obtain the expression (9). Finally, taking the limit as $t \rightarrow \infty$ and noting that $c > 0$, we observe that $e(t) \rightarrow 0$.

Therefore, Lemma 1 has been proven.

The explicit solution in (9) shows that the initial conditions only shape the transient response and do not affect the asymptotic convergence, since:

$$\sigma_0 = \dot{e}_0 + ce_0,$$

the error can be written as:

$$e(t) = (e_0 + (\dot{e}_0 + ce_0)t) \exp(-ct).$$

For $c > 0$, both $\exp(-ct)$ and $t \exp(-ct)$ vanish as $t \rightarrow \infty$, so $e(t) \rightarrow 0$ independently of the particular values of the initial conditions e_0 and $\dot{e}_0$. Thus, the controller does not require zero initial tracking error or zero initial error rate. This clarifies that convergence is a structural property of the closed-loop dynamics, not an artifact of the initial conditions. In practice, the motor may start from rest while the reference is nonzero, so this property is directly applicable.

3.3 Adaptive Controller Design for Trajectory Tracking

Now, we present the design of the adaptive control law for trajectory tracking. Consider the second-order system:

$$\ddot{x}(t) + a\dot{x}(t) + bx(t) = u(t), \quad (14)$$

where $a, b \in \mathbb{R}$ and with initial conditions $x(0) = x_0$ and $\dot{x}(0) = \dot{x}_0$,

Given a reference trajectory $r(t)$, the control objective is to ensure that $x(t) \rightarrow r(t)$ as $t \rightarrow \infty$. The following theorem provides a control law that guarantees this objective.

Theorem 2. (Adaptive Controller Design)

If the control input is designed as:

$$u(t) = \ddot{r}(t) + a_m \dot{r}(t) + b_m r(t) + (a - a_m) \dot{x}(t) + (b - b_m) x(t), \quad (15)$$

where a_m and b_m are positive constants selected as $a_m = 2c$ and $b_m = c^2$ with $c > 0$, then $x(t) \rightarrow r(t)$ as $t \rightarrow \infty$.

Proof: Note, that if we substitute $u(t)$ given in (15) into (14) and we simplify, we obtain:

$$(\ddot{x} - \ddot{r}) + a_m(\dot{x} - \dot{r}) + b_m(x - r) = 0 \quad (16)$$

And defining a new variable e as the error tracking, i.e., $e = x - r$, then $\dot{e} = \dot{x} - \dot{r}$ and $\ddot{e} = \ddot{x} - \ddot{r}$, and given that $a_m = 2c$, $b_m = c^2$ we have:

$$\ddot{e}(t) + 2c\dot{e}(t) + c^2e(t) = 0 \quad (17)$$

And according to Lemma 1, if $c > 0$, then $e(t) \rightarrow 0$ as $t \rightarrow \infty$, which implies that $x(t) \rightarrow r(t)$ as $t \rightarrow \infty$. Therefore, Theorem 2 has been proven.

Remark 2. The control law (15) combines feedforward ($\ddot{r} + a_m \dot{r} + b_m r$) with feedback terms $(a - a_m) \dot{x} + (b - b_m) x$. Adaptation is implicit; no online estimation is required. The design structure $a_m = 2c$ and $b_m = c^2$ with $c > 0$ ensures that the solution $e(t)$ approaches zero asymptotically with a critically damped response, as shown in (13). The selection of c determines the convergence rate toward a neighborhood of zero within a desired time.

4. DESIGN AND IMPLEMENTATION FOR CONTROLLING THE ANGULAR VELOCITY OF A DC MOTOR

To regulate the angular velocity $\omega(t)$ of a DC motor, we consider the second-order system given in equation (4):

$$\ddot{\omega}(t) + a\dot{\omega}(t) + b\omega(t) = u(t)$$

This equation has the same structure as system (14) presented in Section 3.3, which was used to design the adaptive controller given in (15). Based on Theorem 2, we propose the virtual control input $u(t)$ as:

$$u(t) = \ddot{\omega}_r(t) + a_m \dot{\omega}_r(t) + b_m \omega_r(t) + (a - a_m) \dot{\omega}(t) + (b - b_m) \omega(t), \quad (18)$$

where $a_m = 2c$ and $b_m = c^2$. Substituting this control law into (4) we obtain the following closed-loop error dynamics:

$$\ddot{e}_\omega(t) + 2c\dot{e}_\omega(t) + c^2e_\omega(t) = 0 \quad (19)$$

Where $e_\omega(t) = \omega(t) - \omega_r(t)$ represents the angular tracking error, According to Lemma 1, the analytical solution for $e_\omega(t)$ is:

$$e_\omega(t) = [e_\omega(0) + (\dot{e}_\omega(0) + ce_\omega(0))t] \exp(-ct), \quad (20)$$

Since $c > 0$, it follows that $e_\omega(t) \rightarrow 0$ as $t \rightarrow \infty$. This result ensures that the angular velocity of the DC motor $\omega(t)$ converges to the desired angular reference trajectory $\omega_r(t)$.

4.1 Alternative case: Constant angular reference

In the case when the desired angular reference is a constant, i.e., $\omega_r(t) = \omega_r \forall t$, it follows that $\dot{\omega}_r(t) = 0$ and $\ddot{\omega}_r(t) = 0$. Substituting these values into the control law (18), we obtain:

$$u(t) = b_m \omega_r + (a - a_m) \dot{\omega}(t) + (b - b_m) \omega(t) \quad (21)$$

Regardless of whether $\omega_r(t)$ is time-varying or constant, the actual voltage input $v(t)$ to the motor must be applied according to equation (3). It is worth noting that in this work, a constant angular velocity reference was used for the experimental test.

4.2 Selection of c for desired convergence Time

To control the speed of convergence and guarantee that the angular velocity $\omega(t)$ approaches the reference ω_r within a desired finite time T_d , we design the parameter c as:

$$c = -\ln(P)/T_d, \quad 0 < P < 1 \quad (22)$$

By choosing a small value of P , we ensure that the error $e_\omega(t)$ at time $t = T_d$ is sufficiently small. In this work, we propose to set $P = 0.001$.

4.3 Mathematical Justification for Selecting c

The selection of the parameter c plays a crucial role in the performance of the adaptive control law, as it directly governs the convergence rate of the tracking error $e_\omega(t)$. Let us consider the analytical solution of the error tracking given in (20), and assume the initial conditions: $e_\omega(0) = \omega(0) - \omega_r = -\omega_r$; $\dot{e}_\omega(0) = \dot{\omega}(0) - \dot{\omega}_r = 0$

By substituting these conditions into (20), and selecting c according to equation (22), we obtain:

$$e_\omega(t) = \exp\left(\frac{\ln(P)}{t_d}t\right)\left(-\omega_r\left(1 - \frac{\ln(P)}{t_d}t\right)\right)$$

Then evaluating the error at $t = T_d$, we obtain:

$$e_\omega(T_d) = P(-\omega_r(1 - \ln(P))) = P * \gamma,$$

where $\gamma = -\omega_r(1 - \ln(P))$. Since P can be selected arbitrarily small, this ensures that $e_\omega(T_d)$ becomes as close to zero as desired.

Remark 3. (Practical guarantee of convergence). To rigorously justify the previous assertion, note that substituting $\gamma = -\omega_r(1 - \ln(P))$ into $e_\omega(T_d) = P\gamma$ yields:

$$e_\omega(T_d) = -\omega_r(P - P\ln(P))$$

From elementary calculus, it is well known that $\lim_{P \rightarrow 0^+} P\ln(P) = 0$. Therefore, it directly follows that:

$$\lim_{P \rightarrow 0^+} e_\omega(T_d) = -\omega_r(0 - 0) = 0$$

This confirms that selecting P arbitrarily small makes the tracking error at $t = T_d$ arbitrarily small, independent of the specific value of the reference ω_r .

Thus, the practical choice of P (e.g., $P = 10^{-3}$ or 10^{-4}) is mathematically justified without requiring additional iterative tuning or solving implicit equations.

Remark 4. (Physical feasibility of the desired convergence time). It is important to emphasize that, while the mathematical framework guarantees that the tracking error can be made arbitrarily small at any desired time T_d by selecting P sufficiently small, the practical choice of T_d must be consistent with the physical capabilities of the system. For instance, in the case of a DC motor, the angular acceleration is limited by the maximum available voltage, the armature current constraints, and the mechanical inertia. Proposing an excessively short convergence time (e.g., $T_d = 0.5$ seconds to reach 400 RPM) would demand unrealistic torque and voltage values that the actuator cannot deliver, potentially leading to saturation or damage. Therefore, T_d should be selected based on the system's physical limitations, such as the maximum voltage V_{max} , the maximum current I_{max} , and the mechanical time constant of the motor. The experimental results presented in Section 6 were obtained with a physically feasible $T_d = 2$ s, which allowed the motor to track the reference smoothly without exceeding its operational limits.

Therefore, the selection of c according to equation (22) provides both a mathematical and practical justification for achieving a negligible tracking error within the desired convergence time T_d .

5. EXPERIMENTAL SCENARIO

This section describes the experimental setup and the procedures employed to implement and validate the proposed adaptive controller on a DC motor system.

The description encompasses both the hardware configuration and the software environment used to carry out the tests, ensuring that the methodology is transparent and reproducible. Particular attention is given to the specification of the motor, the sensors, and the data acquisition system, as these elements directly influence the accuracy of the measurements and the reliability of the control implementation.

In addition, the procedures for initializing the system, applying the control signals, and recording the motor's response are outlined step by step, providing a clear framework for replication.

The motor employed in this study is the Traxxas Titan 550. To measure the motor's angular velocity ω , a slotted optical switch (H92B4) was employed in conjunction with a 20-slot encoder disc to convert rotational speed into pulse signals.

The input voltage v_{in} was monitored using a voltmeter connected in parallel with the motor, while the armature current i_a was recorded using an ammeter in series with the power source.

Additional current measurements $i(t)$ for controller implementation were obtained using an ACS712 sensor. These measurements allowed the estimation of the motor's key electrical and mechanical parameters, summarized in Table 2.

Table 2. Measured and Calculated Parameters

Parameter	Sym	Value	Description
Resistance	R	4.3Ω	Measured in the motor
Armature current	i_a	0.08A	Measured when the motor starts rotating
Angular velocity	ω	11.52 rad/s	Measured
Input voltage	v_{in}	0.6 V	Measured when ω was taken
Inductance	L	0.0049 H	Measured in the motor
Back EMF constant	k_a	0.02255 V · s/rad	$k_a = \frac{V_{in} - (i_a R)}{\omega}$
Motor torque constant	k_m	0.02255 N · m/A	Assumed equal to k_a
Moment of Inertia	J	0.00015373 Kg · m ²	$J = \frac{t_m \cdot k_a \cdot k_m}{R}$
Torque	τ_m	0.00179 N · m	$\tau_m = k_m \cdot i_a$
Friction coefficient	B	0.00015538 N · m · s/rad	$B = \frac{\tau_m}{\omega}$

These values were critical for constructing the mathematical model of the motor and calculating the controller parameters, such as resistance R , inductance L , torque constant k_m , moment of inertia J , and friction coefficient B .

The actual control input voltage $v(t)$ was computed using the virtual controller $u(t)$ defined in equation (21) and translated into a real voltage command through equation (3).

In all experiments, the reference angular velocity was set as a constant:

$$\omega_r = 41.8 \text{ rad/sec} \approx 399.3 \text{ RPM}$$

Here $t_m = 1.3$ seconds represents the time required for the motor's speed to reach approximately 63% of its final speed following a step voltage input, which was used to estimate the moment of inertia.

6. VALIDATION OF THE ADAPTIVE CONTROLLER: SIMULATION AND EXPERIMENTAL RESULTS

6.1 Simulation Results

Before presenting the experimental results, a preliminary simulation study was conducted to evaluate the theoretical performance of the adaptive controller in tracking the reference angular velocity. This simulation served as an essential step in validating the control strategy under controlled conditions, allowing us to examine its stability, robustness, and convergence properties without the influence of measurement noise or hardware limitations. By analyzing the simulated response, we were able to confirm that the controller achieved accurate trajectory tracking and ensured that the error converged to zero, thereby providing strong evidence of its effectiveness prior to implementation on the physical DC motor system.

Figure 3 shows the simulated response of the system, where the angular velocity $\omega(t)$ successfully converges to the constant reference value $\omega_r = 41.8 \text{ rad/sec}$, demonstrating the expected exponential decay of the tracking error as established in the theoretical framework. In addition, the simulation highlights the capacity of the adaptive controller to maintain performance under parameter variations, such as changes in inertia or friction coefficients, which are common in practical electromechanical systems. The results also emphasize the absence of oscillatory behavior, confirming that the controller enforces a critically damped response consistent with the design objectives. This property is particularly relevant for industrial applications, where overshoot and sustained oscillations can compromise safety and efficiency.

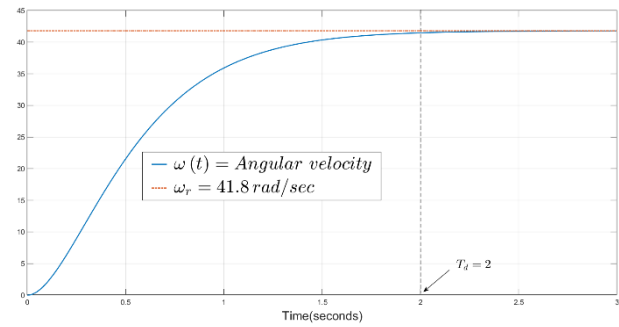


Figure 3. Simulated tracking of the angular velocity reference

Furthermore, the simulation environment allowed for systematic testing across different initial conditions, ensuring that convergence was not limited to a specific operating point but extended to a broad range of scenarios. The robustness observed in these trials provides confidence that the controller can adapt to real-world uncertainties, including load disturbances and sensor inaccuracies.

Another important aspect revealed by the simulation is the predictable adjustment of convergence time through the design parameters, which validates the theoretical claim that transient performance can be explicitly tuned. This feature distinguishes the adaptive approach from conventional PID controllers, where convergence speed is often a byproduct of heuristic tuning rather than a guaranteed property.

Finally, the simulation results serve as a bridge between theory and practice, offering a controlled environment in which mathematical predictions can be verified before hardware implementation. This methodological step not only reduces experimental risks but also strengthens the credibility of the proposed control strategy, ensuring that subsequent experimental validation is grounded in a solid theoretical and computational foundation.

6.2 Experimental Results

The reference angular velocity ω_r and all model parameters were incorporated into the adaptive controller, and the performance was evaluated in real-time operation.

To ensure a desired convergence time of $T_d = 2$ seconds, the tuning constant was selected using equation (22), with $P = 0.001$ resulting in $c = 3.4538$. Consequently, the parameters a_m and b_m were calculated as:

$$a_m = 2c = 6.9076, \quad b_m = c^2 = 11.9287$$

Using the measured motor parameters listed in Table 2, the constants a and b were calculated via equation (2) as:

$$a = 1.010, \quad b = 675.05.$$

With these values, the controller was implemented, and its performance was experimentally evaluated.

Figure 4 presents the measured voltage as a function of time. The voltage stabilizes around 2.3 V while maintaining the angular velocity within a narrow band around the reference, between 399 and 414 RPM. These results confirm the controller's capacity to track the constant reference accurately and maintain stability under real operating conditions. In addition to the steady-state performance, transient analysis revealed that the system reached the reference velocity within approximately 2 seconds, consistent with the theoretical design parameter T_d . The absence of overshoot and oscillations indicates that the adaptive controller achieved a critically damped response, validating the robustness of the tuning procedure.

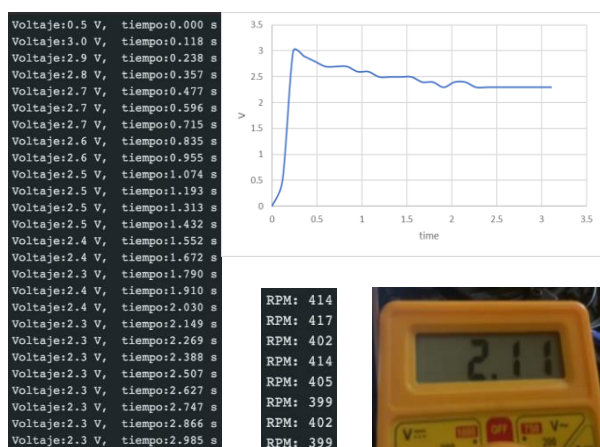


Figure 4. Measured voltage function of time: numerical data and plotted voltage curve.

Moreover, the experimental data demonstrated that the controller effectively compensated for minor fluctuations in supply voltage and mechanical load, maintaining consistent angular velocity even under perturbations. This behavior highlights the adaptive mechanism's ability to adjust feedback gains dynamically, ensuring stability across varying operating conditions.

A comparison with the simulated results showed excellent agreement, confirming that the mathematical model accurately represents the physical system. The experimental validation thus reinforces the theoretical assumptions regarding convergence and stability.

Additionally, the voltage profile exhibited smooth transitions without abrupt changes, which is essential for minimizing electrical stress on the motor and extending its operational lifespan. The controller's capacity to

maintain low steady-state error further underscores its precision in real-time applications.

The results also suggest that the adaptive framework can be generalized to other electromechanical systems with similar dynamic characteristics, offering a scalable approach for industrial automation. The consistency between theoretical predictions, simulation outcomes, and experimental measurements provides strong evidence of the controller's reliability and reproducibility.

Finally, the experimental findings confirm that the proposed adaptive control strategy not only meets the design specifications but also enhances energy efficiency by reducing unnecessary voltage fluctuations. This improvement contributes to smoother operation and reduced thermal losses, making the approach suitable for long-term deployment in precision control environments.

7. ANALYSIS AND DISCUSSION

The experimental results validate the theoretical control strategy presented in earlier sections. As predicted by the analytical solution in equation (20), the tracking error $e_\omega(t)$ decays exponentially over time. The controller effectively drives the system's response to match the desired reference, achieving convergence within the expected time T_d .

The voltage in Figure 4 is smooth, confirming that there are no high frequency oscillations, such as the chattering phenomenon. This avoids mechanical wear and electromagnetic interference. Steady-state voltage (~2.3 V) compensates friction implicitly; any mismatch between nominal and true friction is automatically corrected by the feedback terms.

The selection of the parameter c based on the desired precision level P is mathematically justified in section 4.3. The analysis shows that the final error at $t = T_d$ is directly proportional to P , allowing fine control over system precision through simple tuning.

Compared with traditional PID-based methods, which remain the most widely adopted strategy in industrial motor control applications (Ang et al., 2005; Åström & Hägglund, 2006), the adaptive strategy demonstrated in this study provides a systematic design framework that is explicitly derived from the system's dynamics and offers guaranteed convergence properties. To contextualize these differences, Table 3 summarizes the key features of both control strategies.

Table 3. Comparative assessment between PID and the proposed adaptive controller.

Feature	PID Controller	Proposed Adaptive Controller
1. Tuning Method:	Heuristic (Ziegler-Nichols, trial-and-error)	Systematic (single design parameter c)
2. Number of Tuning Parameters:	3 (K_p, K_i, K_d)	1 (c)
3. Stability Guarantee:	Depends on gain selection	Closed-loop stability guaranteed for any $c > 0$
4. Convergence Time Predictability:	Not explicit	User-defined via T_d and P (Section 4.3)
5. Chattering / Oscillations:	Possible (derivative kick, windup)	Smooth critically damped response
6. Robustness to Parameter Variations:	Limited; requires retuning	Adaptive via feedback terms
7. Implementation Complexity:	Low (no model required)	Moderate (requires model parameters a, b)
8. Theoretical Foundation:	Typically heuristic tuning	Based on order reduction

As shown in Table 3, the proposed controller offers systematic tuning and guaranteed stability, whereas PID relies on heuristic adjustments and provides no inherent stability guarantee. Unlike PID controllers, which rely on heuristic tuning and may struggle to maintain performance under parameter variations or external disturbances, the adaptive approach ensures robustness by continuously adjusting its parameters in response to changes in the system.

Furthermore, while integral action in PID controllers can eliminate steady-state error, it frequently introduces integrator windup and requires anti-windup protection (Visioli, 2006), a complication that is inherently avoided by the proposed critically damped structure. This feature makes the proposed controller particularly well suited for applications where reliability and precision are critical.

While the current investigation focuses on the tracking of a constant reference signal, the theoretical formulation of the control law is sufficiently general to accommodate time-varying references. This adaptability extends the potential scope of the controller to a wide range of scenarios, including trajectory tracking in robotic systems, speed regulation in electromechanical drives, and performance optimization in renewable energy devices. By demonstrating both systematic design and guaranteed convergence, the proposed adaptive strategy not only addresses the limitations of conventional PID-based methods but also opens avenues for broader applications in control engineering.

8. CONCLUSION

This work presented the design and experimental implementation of a model-based reference tracking controller for second-order dynamical systems, specifically applied to the angular velocity control of a DC motor. The proposed methodology demonstrates how reformulating the tracking error dynamics into an equivalent first-order equation significantly simplifies the control law while preserving rigorous convergence guarantees. This reduction facilitates both theoretical analysis and practical implementation, enabling real-time deployment without excessive computational burden.

The experimental results validate the effectiveness of the proposed controller in achieving accurate trajectory tracking under real-world conditions. The systematic selection of the tuning parameter c , based on the desired convergence time T_d and precision level P , proved to be a practical and mathematically justified approach that eliminates trial-and-error tuning. Unlike conventional PID methods, which require multiple iterations to balance rise time, overshoot, and steady-state error, the proposed controller guarantees closed-loop stability for any $c > 0$ and provides predictable convergence, as summarized in Table 3.

From an educational perspective, the order-reduction strategy presented in Theorem 1 offers a valuable pedagogical tool for teaching advanced control concepts, allowing students to appreciate how a linear transformation simplifies a second-order system without resorting to state-space methods or Lyapunov theory. The experimental validation on a low-cost DC motor platform reinforces the connection between theory and practice, making this approach accessible to undergraduate and graduate laboratories.

In summary, this work contributes a novel design methodology that leverages order reduction to achieve both theoretical elegance and practical feasibility. The successful experimental results encourage further exploration of this approach in more complex systems, including time-delay systems, fractional-order systems, and nonlinear mechanical systems, as well as extensions to time-varying reference signals and multi-variable control scenarios. Moreover, the framework presented here opens opportunities for integration with adaptive and robust control paradigms, enabling systematic handling of parameter uncertainties and external disturbances. Future research may also investigate its applicability in distributed control architectures, where scalability and computational efficiency are critical. By bridging theoretical rigor with experimental validation, this study establishes a foundation for the development of intelligent controllers that are not only mathematically sound but also practically deployable in diverse engineering domains.

Acknowledgements

The authors thank CONAHCYT-SECIHTI for the scholarships given.

References:

- Acosta Lúa, C., Di Gennaro, S., Navarrete-Guzmán, A., & Rivera-Domínguez, J. (2021). Digital sliding mode controllers for active control of ground vehicles. *Asian Journal of Control*, 23(5), 2129–2144. <https://doi.org/10.1002/asjc.2627>
- Ang, K. H., Chong, G., & Li, Y. (2005). PID control system analysis, design, and technology. *IEEE Transactions on Control Systems Technology*, 13(4), 559–576. <https://doi.org/10.1109/TCST.2005.847331>
- Åström, K. J., & Hägglund, T. (2006). *Advanced PID control*. ISA–The Instrumentation, Systems, and Automation Society.
- Chapa, R., Ibarra, E., & Guzmán, V. (2023). Novel nonlinear control method for first-order systems and its implementation in a temperature system. *Mathematical Problems in Engineering*, 2023, Article 1029575. <https://doi.org/10.1155/2023/1029575>
- Ekow Abban, J. (2021). Application of classical conventional PI and PID controllers and smart fuzzy logic controller for load frequency and tie-line power control in multigeneration power system. *Proceedings on Engineering Sciences*, 3(3), 293–302. <https://doi.org/10.24874/PES03.03.006>
- Honda, K., Okuda, H., Suzuki, T., & Ito, A. (2023). Connection of nonlinear model predictive controllers for smooth task switching in autonomous driving. *Asian Journal of Control*, 25(3), 1805–1822. <https://doi.org/10.1002/asjc.2892>
- Jimenez-Lizarraga, M., Chapa, R., Rodriguez, C., Arellano, H., & Castillo, P. (2015). Robust control for multi-model planar robots coordination. In *2015 23rd Mediterranean Conference on Control and Automation (MED)* (pp. 859–864). IEEE. <https://doi.org/10.1109/MED.2015.7158864>
- Jimenez-Lizarraga, M., Chapa, R., Rodriguez, C., & Garcia, O. (2019). ε -Saddle point solution for a nonlinear robot coordination game. *Cybernetics and Systems*, 50(3), 261–280. <https://doi.org/10.1080/01969722.2018.1541600>
- Jimenez-Lizarraga, M., Garcia, O., Chapa-Garcia, R., & Rojo-Rodriguez, E. G. (2018). Differential game-based formation flight for quadrotors. *International Journal of Control, Automation and Systems*, 16(4), 1854–1865. <https://doi.org/10.1007/s12555-017-0137-8>
- Kim, Y., Choi, Y., Widemann, D., & Zohdi, T. (2022). A fast and accurate physics-informed neural network reduced order model with shallow masked autoencoder. *Journal of Computational Physics*, 451, Article 110841. <https://doi.org/10.1016/j.jcp.2021.110841>
- Montoya-Acevedo, D., Gil-González, W., Montoya, O. D., Restrepo, C., & González-Castaño, C. (2024). Adaptive speed control for a DC motor using DC/DC converters: An inverse optimal control approach. *IEEE Access*, 12, 154503–154513. <https://doi.org/10.1109/ACCESS.2024.3482982>
- Müller, F., Siokos, A., Kolb, J., Nell, M., & Hameyer, K. (2021). Efficient estimation of electrical machine behavior by model order reduction. *IEEE Transactions on Magnetics*, 57(6), 1–4. <https://doi.org/10.1109/TMAG.2021.3070183>
- Nichols, K. M., Roembke, R. A., & Adamczyk, P. G. (2025). Real-time motor control using a Raspberry Pi, ROS, and CANopen over EtherCAT, with application to a semi-active prosthetic ankle. *Actuators*, 14(2), Article 84. <https://doi.org/10.3390/act14020084>
- Nizami, T. K., Gangula, S. D., Udumula, R. R., Chakravarty, A., Ahmad, F., & Hosseinpour, A. (2025). Nonlinear adaptive neural control of power converter-driven DC motor system: Design and experimental validation. *Engineering Reports*, 7(1), Article e13025. <https://doi.org/10.1002/eng2.13025>
- Oliver Wane, S., Butler, M., & James Bautista, A. (2024). Development of a microcontroller-based robot and its use in teaching control and navigation. *Proceedings on Engineering Sciences*, 6(4), 1685–1694. <https://doi.org/10.24874/PES06.04.027>
- Prajapati, A. K., & Prasad, R. (2022). A new generalized pole clustering-based model reduction technique and its application for design of controllers. *Circuits, Systems, and Signal Processing*, 41(3), 1497–1529. <https://doi.org/10.1007/s00034-021-01860-0>
- Shui, Y., Zhao, T., Dian, S., Hu, Y., Guo, R., & Li, S. (2022). Data-driven generalized predictive control for car-like mobile robots using interval type-2 T-S fuzzy neural network. *Asian Journal of Control*, 24(3), 1391–1405. <https://doi.org/10.1002/asjc.2531>
- Shukla, A., Sen, A. P., Ganesh, D., & Singh, B. P. (2024). Fine-tuning load frequency stability in three-area power system: Customizing PID controller via hybrid galactic gravitational optimization. *Proceedings on Engineering Sciences*, 5(4), 321–330. <https://doi.org/10.24874/PES.SI.24.02.015>

- Singh, K., Saroha, S., & Verma, A. (2024). An analysis on integration of solar and wind power into a single-phase grid with an optimal parameterized fractional-order PID controller. *Proceedings on Engineering Sciences*, 6(4), 1695–1702. <https://doi.org/10.24874/PES06.04.028>
- Touzé, C., Vizzaccaro, A., & Thomas, O. (2021). Model order reduction methods for geometrically nonlinear structures: A review of nonlinear techniques. *Nonlinear Dynamics*, 105(2), 1141–1190. <https://doi.org/10.1007/s11071-021-06693-9>
- Varga, B., Tar, J. K., & Horváth, R. (2024). Fractional order inspired iterative adaptive control. *Robotica*, 42(2), 482–509. <https://doi.org/10.1017/S0263574723001595>
- Visioli, A. (2006). *Practical PID control*. Springer.
- Yang, C., Fan, Z., & Xia, Y. (2024). Convex model-based reduced-order model for uncertain control systems. *IEEE Transactions on Systems, Man, and Cybernetics: Systems*, 54(7), 4236–4246. <https://doi.org/10.1109/TSMC.2024.3373031>
- Zekraoui, H., Ouchbel, T., El Hafyani, M. L., El Fahssi, M., Majout, B., Bossoufi, B., Skruch, P., Zhilenkov, A., & Mobayen, S. (2025). Experimental implementation of design of an asynchronous machine-based wind emulator using backstepping control. *Scientific Reports*, 15(1), Article 9125. <https://doi.org/10.1038/s41598-025-94042-w>

Efrain Ibarra Jimenez

Instituto Tecnológico de Durango,
Victoria de Durango,
Mexico
efrainibarra@itdurango.edu.mx
ORCID 0000-0001-8200-9858

Omar Vargas Gutierrez

Instituto Tecnológico de Durango,
Victoria de Durango,
Mexico
13041056@itdurango.edu.mx
ORCID 0009-0000-3480-7716

Ricardo Chapa Garcia

Universidad Autónoma de Nuevo León,
San Nicolás de los Garza,
Mexico
ricardo.chapagr@uanl.edu.mx
ORCID: 0000-0002-1676-9274

Romeo Selvas Aguilar

Universidad Autónoma de Nuevo León,
San Nicolás de los Garza,
Mexico
romeo.selvasag@uanl.edu.mx
ORCID 0000-0001-7012-3901

Appendix A. Derivation of the Angular Velocity Model

The mathematical model of the DC motor is obtained from its electrical and mechanical dynamics, given by:

$$L \frac{di(t)}{dt} = v(t) - Ri(t) - k_a \omega(t) \quad (23)$$

$$J \frac{d\omega(t)}{dt} = k_m i(t) - B\omega(t) \quad (24)$$

Differentiating equation (24) with respect to time:

$$J \frac{d^2\omega(t)}{dt^2} = k_m \frac{di(t)}{dt} - B \frac{d\omega(t)}{dt} \quad (25)$$

Substituting $\frac{di(t)}{dt}$ from equation (23) into (25) and simplifying we obtain the equation (1) that describes the angular velocity dynamics of the motor.

This derivation highlights the intrinsic coupling between the electrical and mechanical subsystems, where current variations directly influence torque generation and angular acceleration. The resulting second-order differential equation captures the essential dynamic behavior of the motor, serving as the foundation for controller design. By applying order reduction techniques, the model can be simplified to a first-order representation, facilitating analytical tractability while preserving the dominant dynamics. Such simplification is particularly relevant for adaptive control strategies, as it enables real-time implementation without sacrificing stability guarantees.